

【注意】
縮尺 5:1
外径寸法フォント ポイント24
正接エッジ 正接エッジに線フォント使用


Under development

2020/03/09

6x15x2mm (HDR2260-014180)

■ Features :

- Wide Band compliance
- Waterproof (IPX5, IPX8(1.5m)) compliance
- Back volume = 3 cc or Less
- Haring aid compliance
- Compliant with RoHS

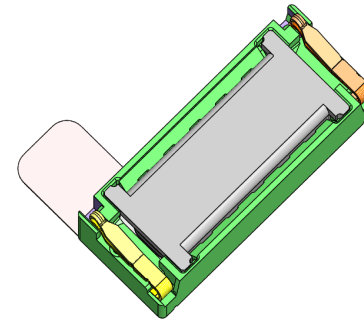

■ Specifications :

Nominal Impedance	27±20% Ω
Sound Pressure Level	118±3dB [rel 20μPa]※1
Input Pwr (Nom)	23.7mW
Input Pwr (Max)	47.3mW
Typical back volume	3cc
F0	415±220Hz※2
Connection Type	Leaf Spring
Water proof	Supported

note :

※1)at 1kHz/23.7mW/back volume:Free

※2)23.7mW/back volume :Free

■ Frequency Response :

