


【注意】
縮尺 5:1
外径寸法フォント ポイント24
正接エッジ 正接エッジに線フォント使用

Under development
2020/03/09

6x12xt2.3mm (HDR2275-014070)

■ Features :

- High Rated Power and High Sound Pressure Level.
- Waterproof (IPX5, IPX8(1.5m)) compliance
- BackVolume =5cc or Less
- Compliant with RoHS

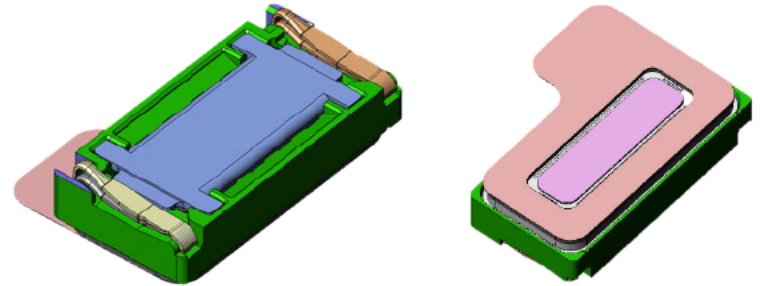

■ Specifications :

Nominal Impedance	32±6 Ω
Sound Pressure Level	120±3dB [rel 20μPa]※1
Input Pwr (Nom)	50mW
Input Pwr (Max)	70mW
Typical back volume	5cc
F0	600±20% Hz※2
Connection Type	Leaf Spring
Water proof	supported

note :

※1)at 1kHz/50mW/back volume:5cc

※2)50mW/back volume :5cc

■ Frequency Response :

