



Overview

- **A2B ローカル電源供給**
- **車両接近通報装置用**
- **防水対応**
- 通知音、警報音、音声ガイダンス等に使用可能



Block diagram

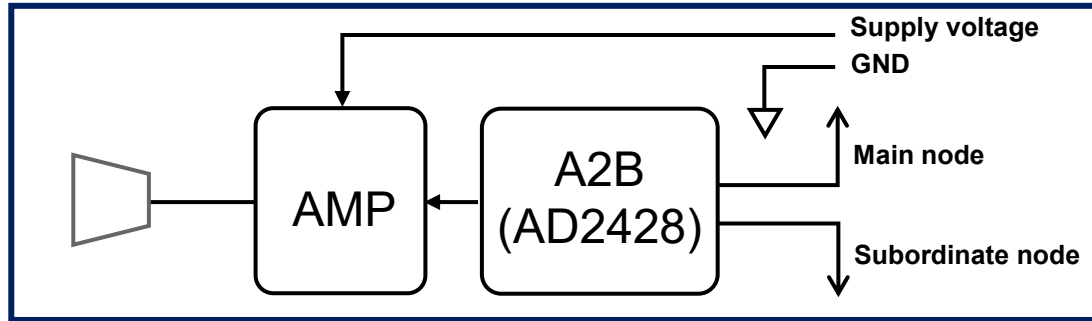

Frequency response

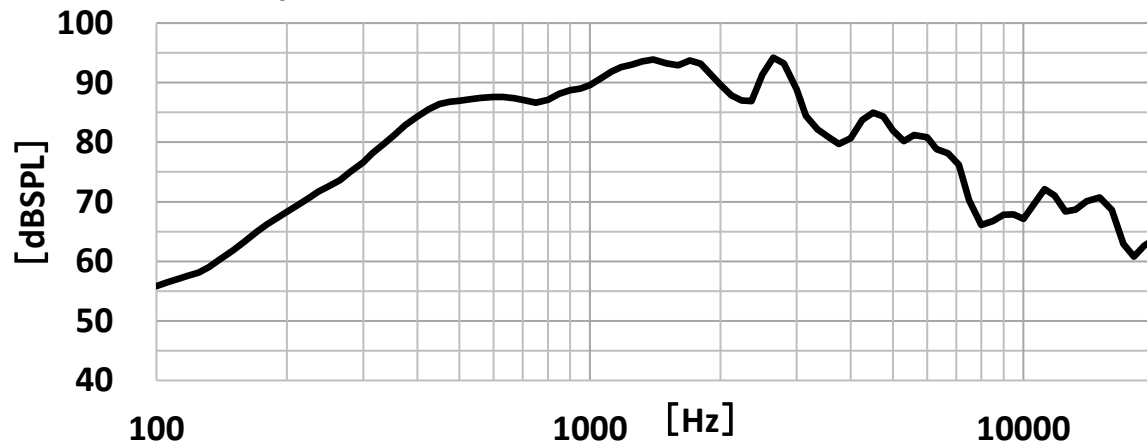

Appearance

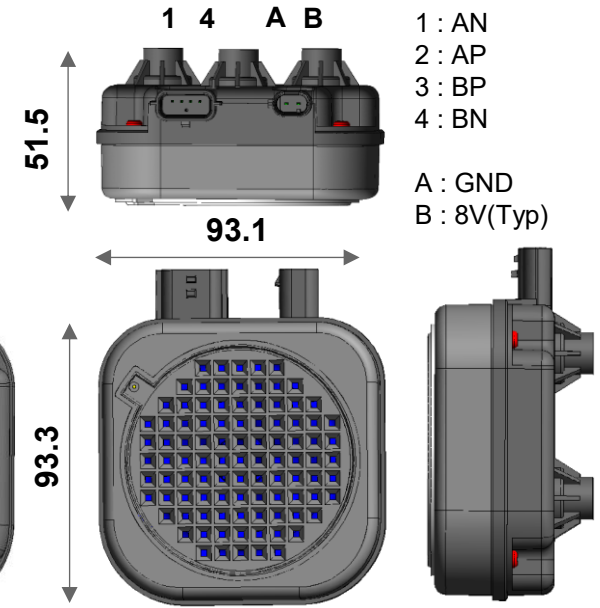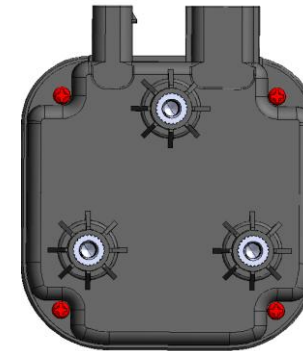

※Mating component is
4pin : 7283-8853-30 (Yazaki)
2pin : 1-1718811-1(TE).

Specifications

Item	HDR6033
Operation Temperature Range	-40°C ~ +105°C
Maximum Rated Input	3W
Supply Voltage	8V
Sound pressure level	91 ± 3 dB/1W at 1m,1kHz
Maximum sound pressure level	95dB SPL (3W)
Weight	295g
Current consumption	140mA(Typ) (1W at 1kHz)