



## Overview

- IP69K
- 風雑対策品
- 用途：VR/サイレン検出


## Block diagram

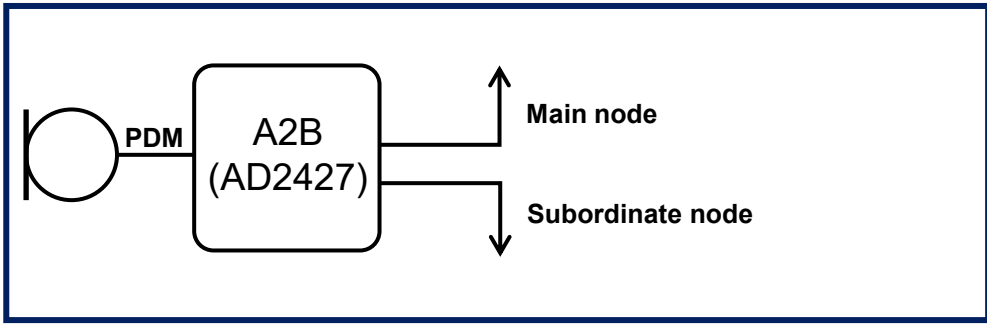

## Frequency response

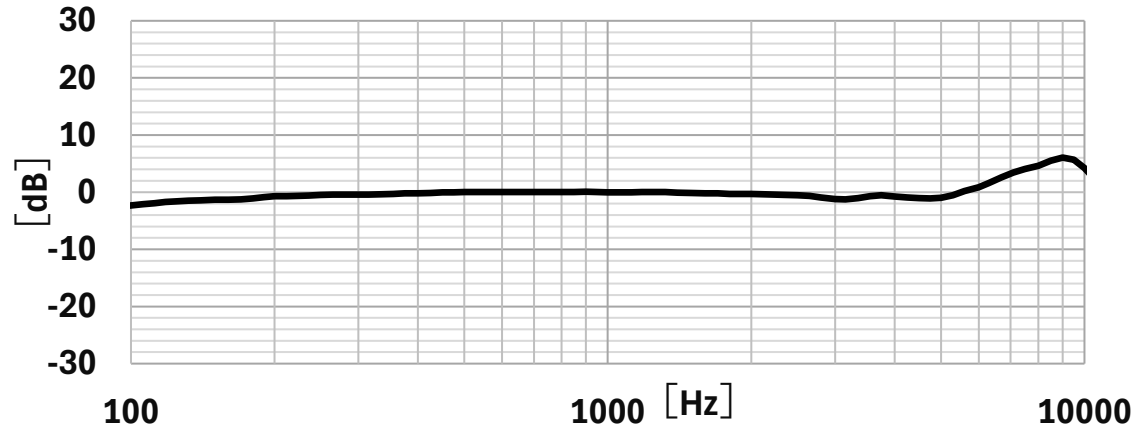

## Appearance

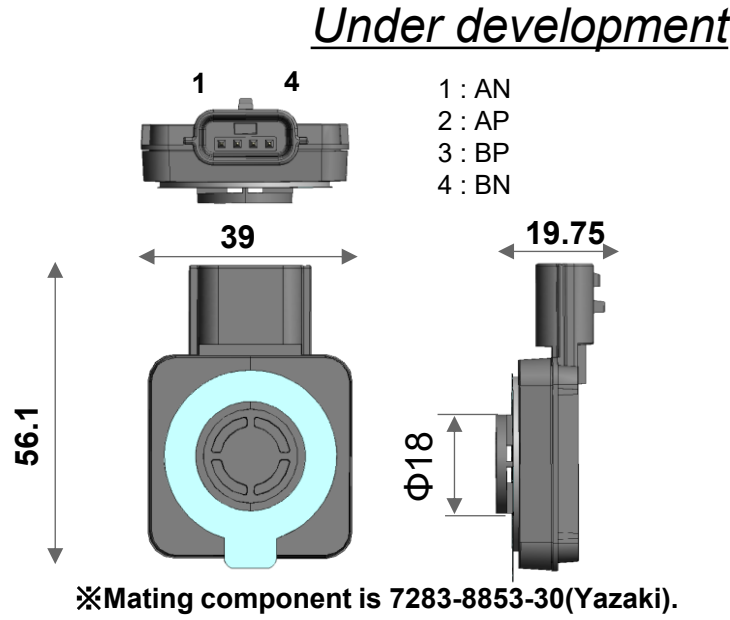

## Specifications

Item	HHM1094
Operation Temperature Range	-40°C ~ +105°C
Maximum Input Level	130dB SPL (THD 10% Typ at 1kHz)
SN Ratio	60dB (Min)
Sensitivity	-36 ± 2 dBFS/Pa at 1kHz
Latency	50 μ sec
Current consumption	Max 20mA
Connector	7282-8853-30(Yazaki compatible)