
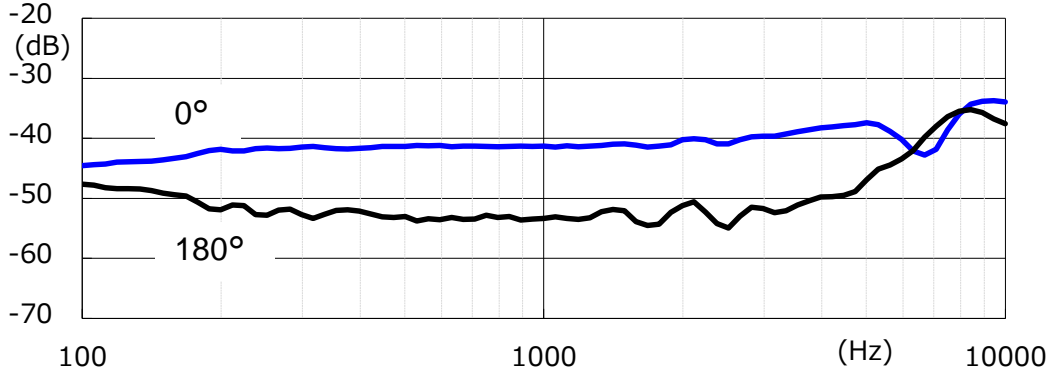


# Handsfree Microphone – Part number : KHM0016

Analog output	Visible type(KHM0016)
<p>Appearance  <b>Size:Φ11.6x35.9x19.1mm</b></p>	
<p>Sensitivity</p>	<p>-43.5±3 dB</p>
<p>Frequency response                      (Typ.)</p>	
<p>Directivity</p>	<p>Uni</p>
<p>Signal to noise ratio(A)</p>	<p>60 dB Typ.</p>

**Handsfree Microphone – Part number : KHM0016**

<b>Analog output</b>	<b>Visible type(KHM0016)</b>
Total harmonic distortion (at 1kHz)	1% Max./100dB SPL
Standard power supply	5.0 V
Current consumption	1mA Max.
Output Impedance	1k $\Omega$ Max.
Operating voltage	1.3~10 V
Operating temperature	-30 $^{\circ}$ C ~ +75 $^{\circ}$ C
Storage temperature	-40 $^{\circ}$ C ~ +85 $^{\circ}$ C

# Handsfree Microphone – Part number : KHM0016

Analog output	Visible type(KHM0016)
<p>Test circuit</p>	<p style="text-align: right;"> <math>R_L = 1k\Omega</math>  <math>C = 1\mu F</math> </p>
<p>Mechanical dimensions</p>	<p>Refer to Page 4</p>
<p>Packaging (STD)</p>	<p>Carton(200pcs/1 carton)</p>

# Handsfree Microphone – Part number : KHM0016

