
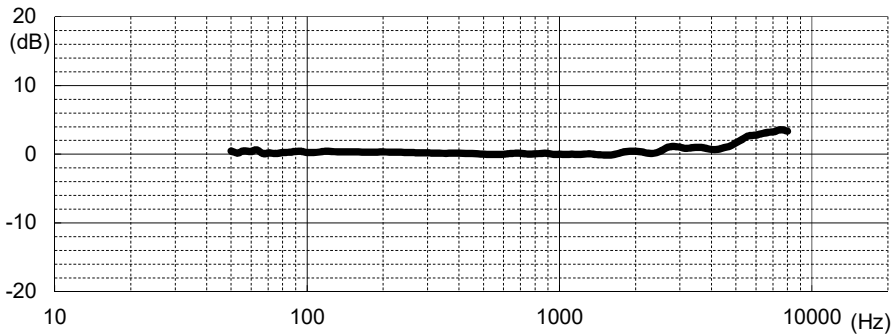
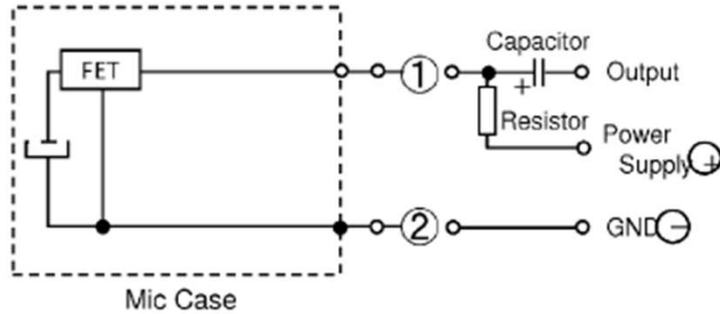


Electret Condenser Microphone – Part number : KUB0623


Analog output	Omni-Directional(KUB0623)
Appearance Size: Dia.4x1.3mm	<Soldering type> 
Sensitivity	-42 ±3 dB
Frequency response (Typ.)	
Signal to noise ratio(A)	58 dB Min.
Total harmonic distortion (at 1kHz)	1% Max./100dB SPL
Standard power supply	2.0 V
Current consumption	0.5mA Max.
Output Impedance	2.2kΩ Max.

Electret Condenser Microphone – Part number : KUB0623

Analog output	Omni-Directional(KUB0623)
Operating voltage	1~10 V
Operating temperature	-20℃ ~ +70℃
Storage temperature	-20℃ ~ +70℃
Test circuit	 Resistor= 2.2 kΩ Capacitor= 1 μF
Mechanical dimensions	Refer to Page 3
Packaging	1kpcs/Inner carton

Electret Condenser Microphone – Part number : KUB0623

<Soldering type>

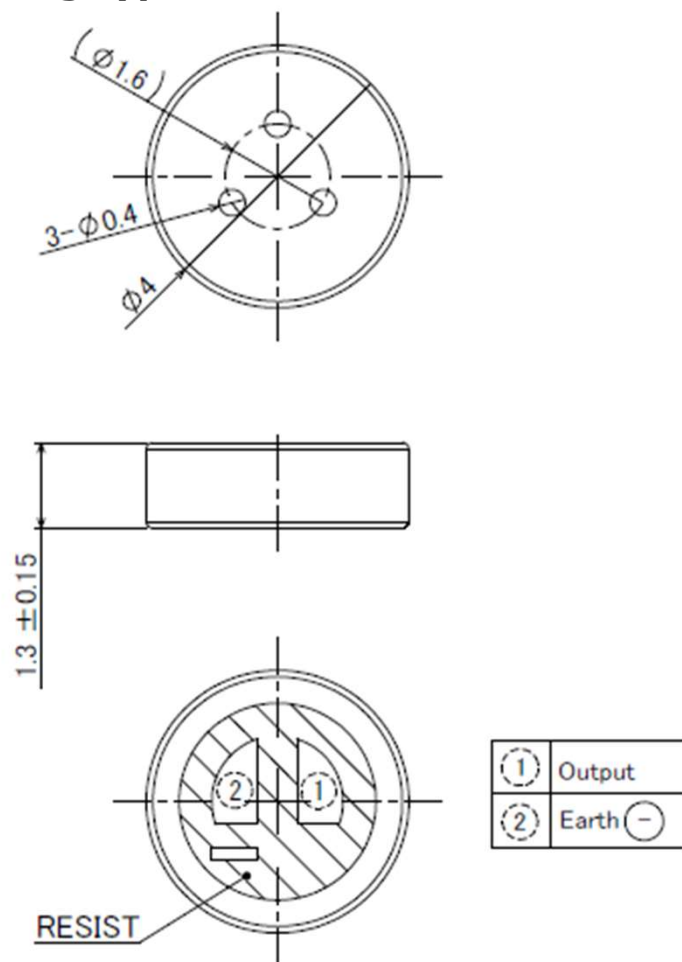

1.UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS
TOLERANCE ON DECIMALS ± 0.2 .