
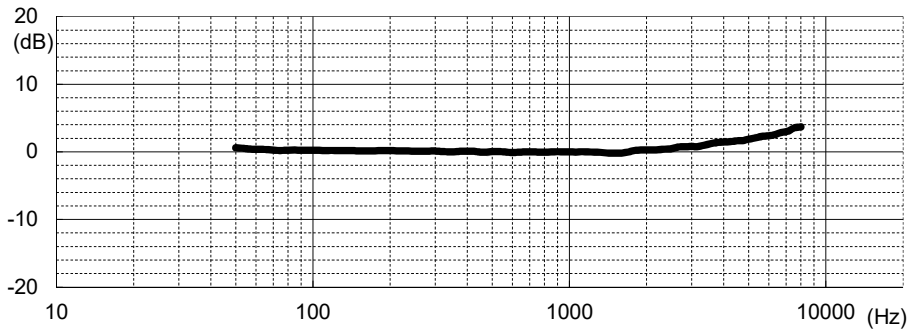
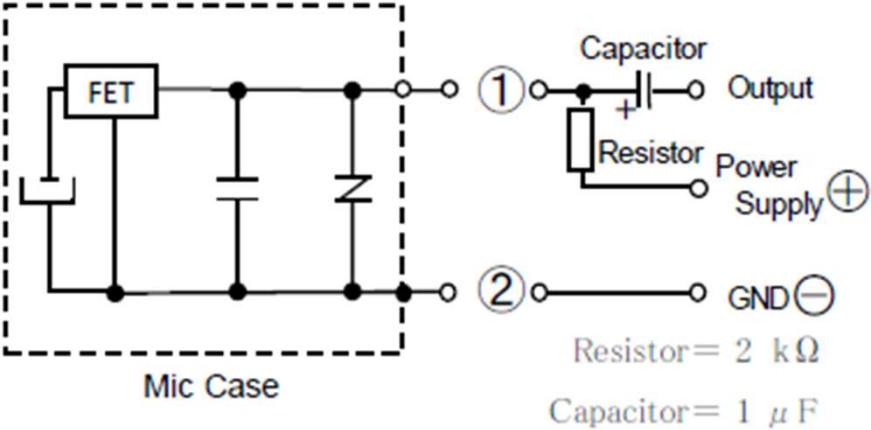


Electret Condenser Microphone – Part number : KUB4223

Analog output	Omni-Directional(KUB4223)
Appearance Size: Dia.6x1.9mm	<Soldering type> 
Sensitivity	-34±2 dB
Frequency response (Typ.)	
Signal to noise ratio(A)	64 dB Min.
Total harmonic distortion (at 1kHz)	1% Max./100dB SPL
Standard power supply	3.0 V
Current consumption	0.65mA Max.
Output Impedance	2kΩ Max.

Electret Condenser Microphone – Part number : KUB4223

Analog output	Omni-Directional(KUB4223)
Operating voltage	1~8 V
Operating temperature	-20°C ~ +70°C
Storage temperature	-20°C ~ +70°C
Test circuit	 <p style="text-align: center;">Mic Case</p> <p style="text-align: right;">Resistor = 2 kΩ Capacitor = 1 μF</p>
Mechanical dimensions	Refer to Page 3
Packaging	1kpcs/Inner carton

Electret Condenser Microphone – Part number : KUB4223

<Soldering type>

