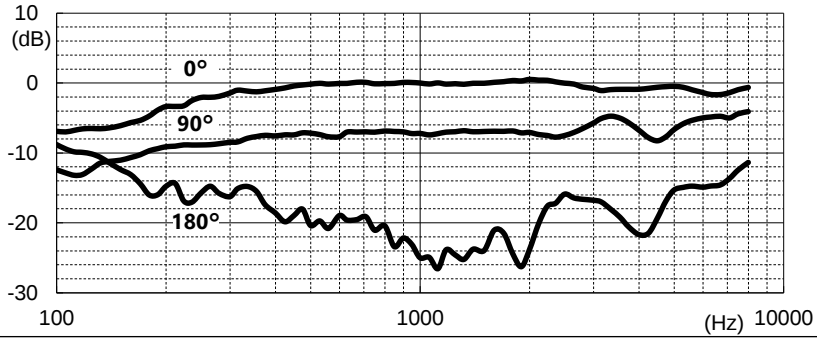
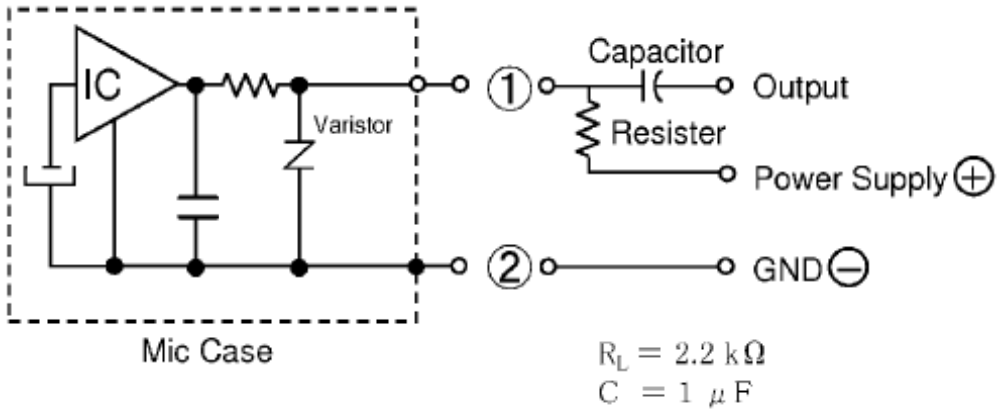


Electret Condenser Microphone – Part number : KUB8923

Analog output	Uni-Directional(KUB8923)
Appearance Size: Dia.9.4x4.7mm	<Soldering type> 
Sensitivity	-40 ±3 dB
Frequency response (Typ.)	
Directivity Sensitivity	10 dB Min.
Signal to noise ratio(A)	59 dB Min.
Total harmonic distortion (at 1kHz)	1% Max./100dBSPL
Standard power supply	4.5 V
Current consumption	0.5mA Max.
Output Impedance	2.2kΩ Max.

Electret Condenser Microphone – Part number : KUB8923

Analog output	Uni-Directional(KUB8923)
Operating voltage	1~10 V
Operating temperature	-20℃ ~ +70℃
Storage temperature	-20℃ ~ +70℃
Test circuit	 Mic Case Capacitor Resistor Varistor IC Output Power Supply ⊕ GND ⊖ $R_L = 2.2 \text{ k}\Omega$ $C = 1 \text{ }\mu\text{F}$
Mechanical dimensions	Refer to Page 3
Packaging	1kpcs/Inner carton

Electret Condenser Microphone – Part number : KUB8923

<Soldering type>

