

Full-Bandwidth Directional Microphone

For Crucial Voice Clarity.


A microphone with a wide frequency response and optimal directional characteristics



High-quality Sound and Optimal Directional Characteristics Achieved through Linear Processing

Features

- Cardioid Polar Response

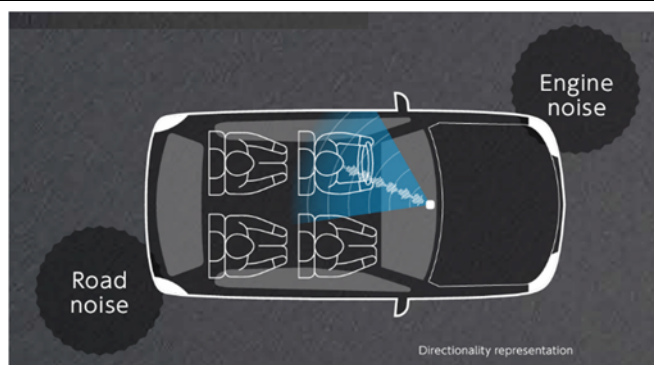

•Specification indicated in this Technical Report is outline only at present. Any products in this Technical Report are subject to any modification for further development and the products improvements without prior notification. •When employing the product, use of an officially authorized specification is recommended. •Please feel free to contact us with any enquiries about our products and their uses.




Hosiden Corporation

4-33, Kitakyuhoji 1-chome, Yao, Osaka 581-0071 JAPAN
www.hosiden.com/en/

As of November 2024
 (TE2024-11)

Features

- Frequency Response to 16kHz

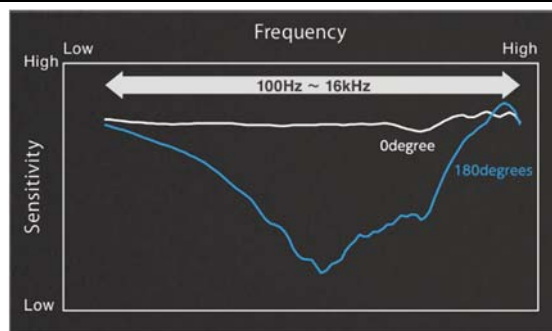

Applications

- Hands-free calls
- Voice recognition



Specifications

Item	Specification
Operating Temperature Range	−40 to 85°C
Maximum Input Sound Pressure Level	106dBSPL
Directionality	12dB min. at 1kHz
S/N Ratio	58dB min.
Sensitivity	−10.5 ± 2.5dBV / Pa at 1kHz

•Specification indicated in this Technical Report is outline only at present. Any products in this Technical Report are subject to any modification for further development and the products improvements without prior notification. •When employing the product, use of an officially authorized specification is recommended. •Please feel free to contact us with any enquiries about our products and their uses.

