



Overview

- **A2B Local powered**
- **For Acoustic Vehicle Alerting System**
- **Waterproof**
- **Used for message alert tones, warning tones, audio guidance, and other sounds**



Block diagram

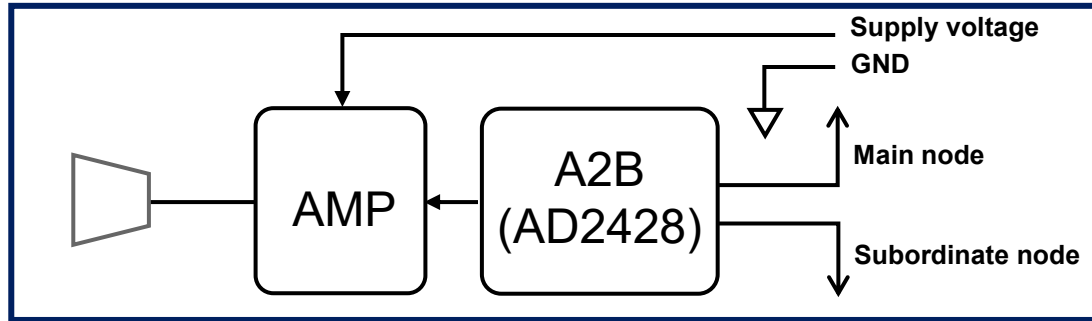

Frequency response

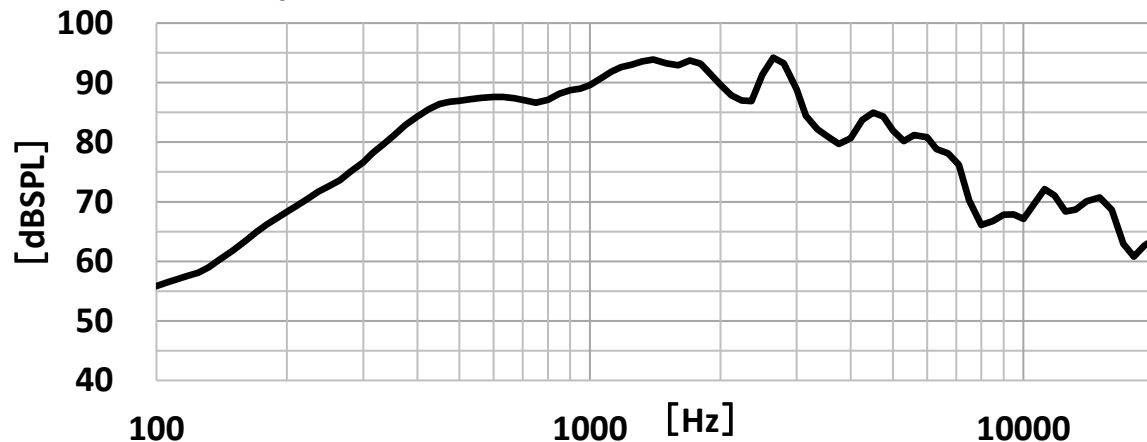

Appearance

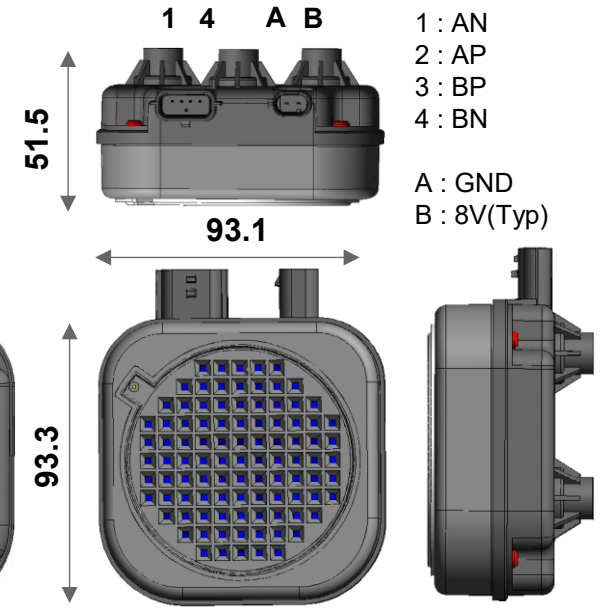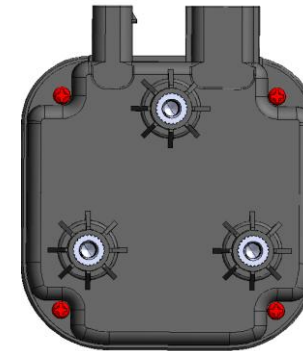

Under development

Specifications

※Mating component is
4pin : 7283-8853-30 (Yazaki)
2pin : 1-1718811-1(TE).

Item	HDR6033
Operation Temperature Range	-40°C ~ +105°C
Maximum Rated Input	3W
Supply Voltage	8V
Sound pressure level	91 ± 3 dB/1W at 1m,1kHz
Maximum sound pressure level	95dB SPL (3W)
Weight	295g
Current consumption	140mA(Typ) (1W at 1kHz)