



■ Overview

- **IP69K**
- **Wind noise suppression**
- Capable of array microphone customization
- For VR & Siren detection

■ Block diagram

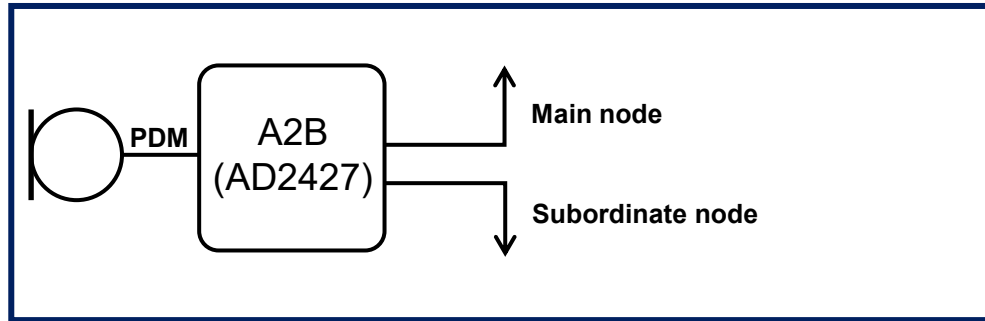


■ Frequency response

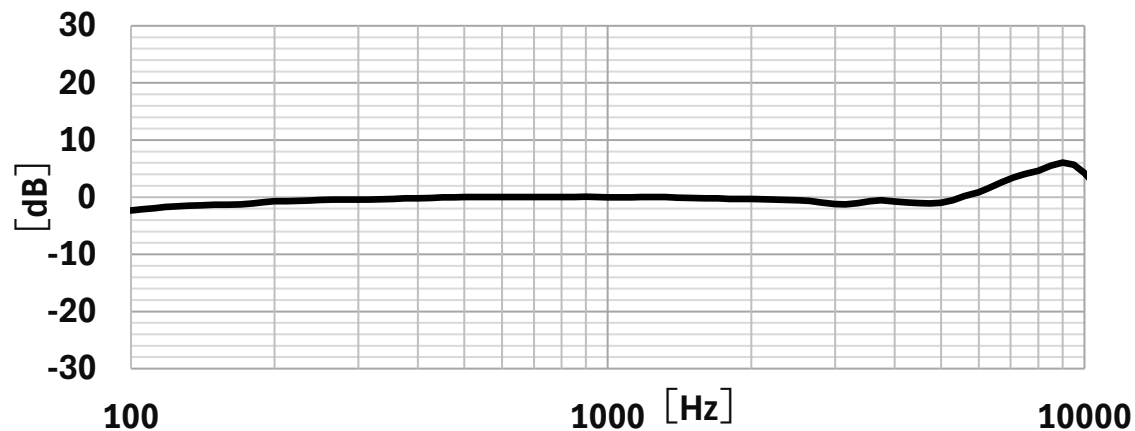

■ Appearance



Under development

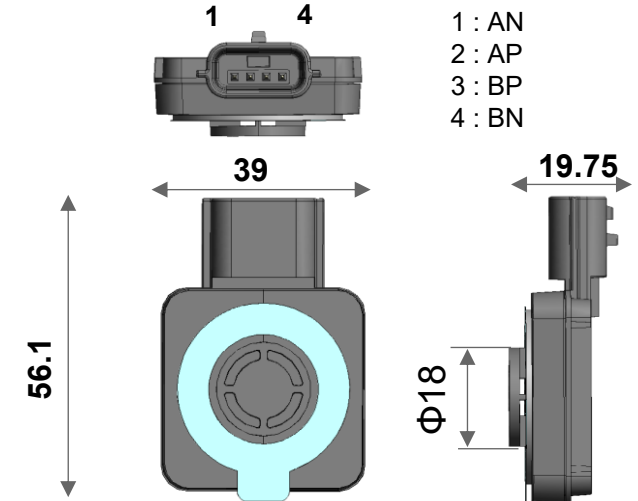

■ Specifications

※Mating component is 7283-8853-30(Yazaki).

Item	HHM1094
Operation Temperature Range	-40°C ~ +105°C
Maximum Input Level	130dB SPL (THD 10% Typ at 1kHz)
SN Ratio	60dB (Min)
Sensitivity	-36 ± 2 dBFS/Pa at 1kHz
Latency	50 μ sec
Current consumption	Max 20mA
Connector	7282-8853-30(Yazaki compatible)