


HSC2013

Plug



定格電圧 Rated voltage	1000V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

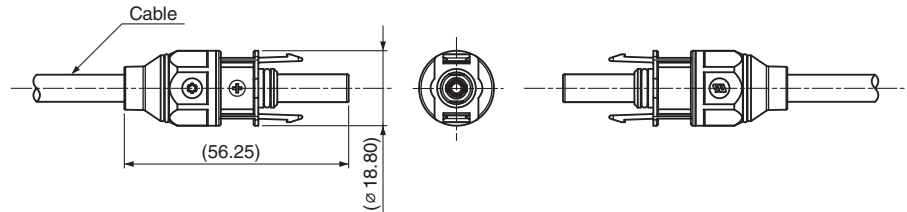


プラグ Plug	適合ソケット Mate Socket
HSC2013	HSC2014 HSC2015

HSC2014

Socket (Half Lock)



定格電圧 Rated voltage	1000V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

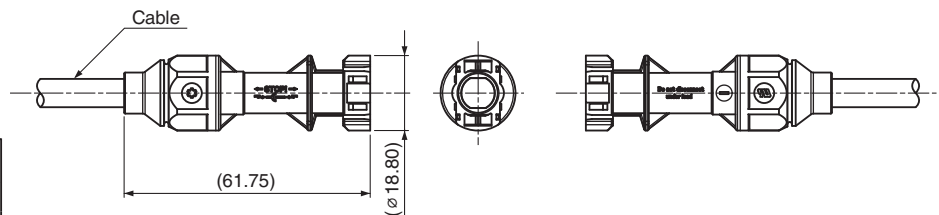


HSC2015

Socket (Full Lock)




定格電圧 Rated voltage	1000V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

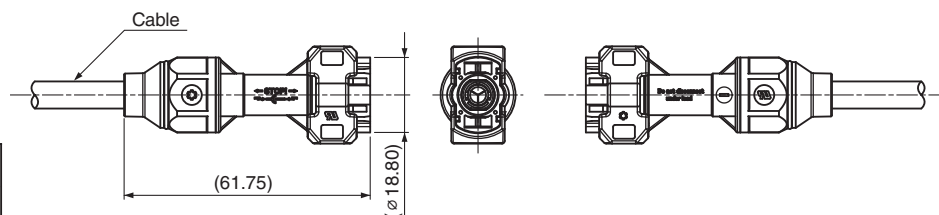


HSC2016

Plug

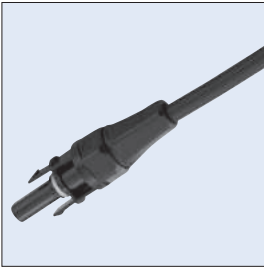

定格電圧 Rated voltage	1500V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

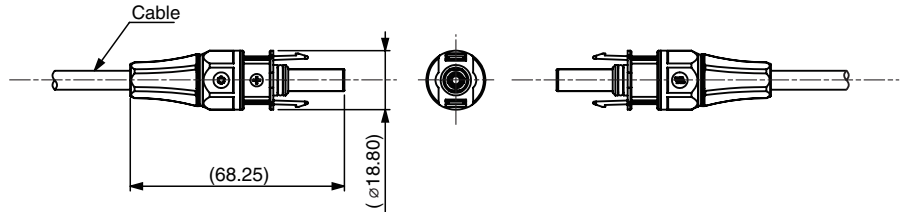


プラグ Plug	適合ソケット Mate Socket
HSC2016	HSC2017 HSC2018

HSC2017

Socket (Half Lock)



定格電圧 Rated voltage	1500V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

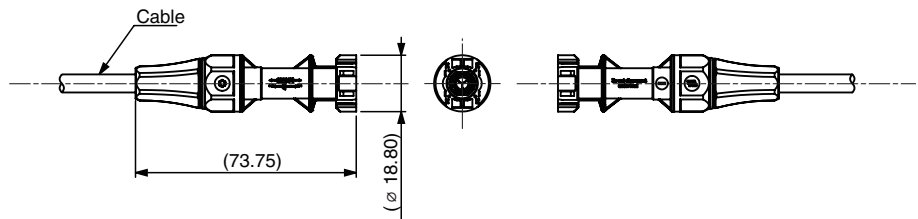

HSC2018

Socket (Full Lock)



定格電圧 Rated voltage	1500V DC max.
定格電流 Rated current	30A DC max.
使用温度範囲 Operating temperature	-40°C to 90°C (TÜV) -40°C to 85°C (UL)
保護等級 Degree Protection	IP67
認証 Certification	TÜV UL

