
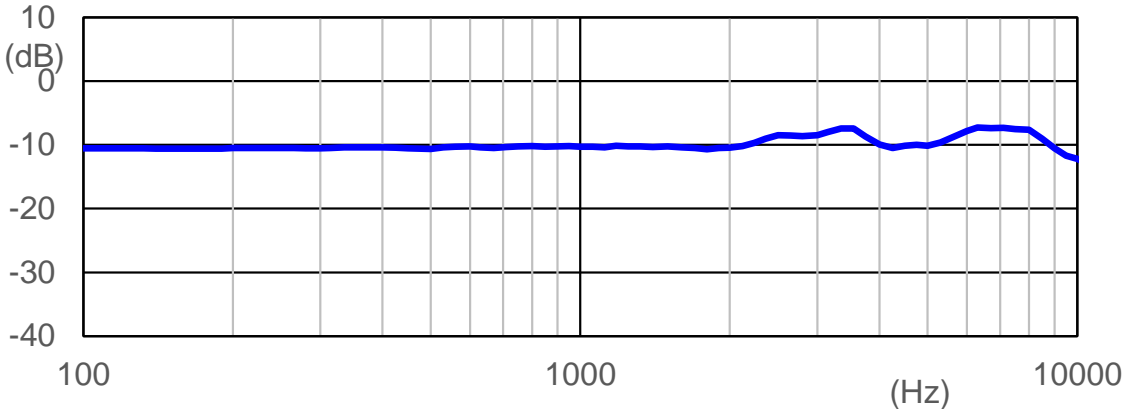


Handsfree Microphone – Part number : KHM0091

Analog output	Built-In type(KHM0091)
<p>Appearance Size:25.6x13.6x8mm</p>	
Sensitivity	-10.5±3 dB
<p>Frequency response (Typ.)</p>	
Directivity	Omni
Signal to noise ratio(A)	62 dB Typ.

Handsfree Microphone – Part number : KHM0091

Analog output	Built-In type(KHM0091)
Total harmonic distortion (at 1kHz)	3% Max./106dBSPL
Standard power supply	8.0 V
Current consumption	8mA Max.
Output Impedance	200Ω Max.
Operating voltage	8V±10%
Operating temperature	-30°C ~ +85°C
Storage temperature	-40°C ~ +85°C

Handsfree Microphone – Part number : KHM0091

Analog output	Built-In type(KHM0091)
<p>Test circuit</p>	<p style="text-align: right;"> $R_L = 680 \Omega$ $C = 1 \mu F$ </p>
<p>Mechanical dimensions</p>	<p>Refer to Page 4</p>
<p>Packaging (STD)</p>	<p>Carton(200pcs/1 carton)</p>

Handsfree Microphone – Part number : KHM0091

Pin No.	
A	MIC1+
B	MIC1-
C	MIC2+
D	MIC2-

